



A unique product of American ingenuity—This timeless toy delights another generation!

How's It Go?

1. Sit on the middle of the seat.
2. Place feet on the handlebars.
3. Grip the handlebars.
4. Swing the handlebars from side to side (don't just turn them—**swing!!**)



The Roller Racer® has a One Year Limited Warranty. This product is designed for home-use only. Usage in institutional or commercial settings voids warranty. Replacement parts are available. Contact Big Time Toys to order. As per our discretion, we will replace the defective part or the entire unit. This warranty does not cover damages resulting from misuse of product.

Safety Instructions

The **Roller Racer®** is a safe toy for children following these guidelines.

1. Do not use on or near inclines, roadways, bodies of water or stairs.
2. Always ride seated with feet on the handlebars.
3. Wear shoes and a helmet.
4. Allow only one rider at a time.
5. Weight limit is 150 lbs.



Big Time Toys, LLC.
2823 Dogwood Place, Nashville, TN 37204
Toll Free 800-419-3810
www.bigtimetoys.com



We are happy that you are happy. If you don't know how to express your happiness, we've got a few recommendations...



Share your happy experience with an online review.



Not Happy?


Our friendly supportive service will work hard to put a smile back on your face. Here's how we can connect:



Email us at:
info@bigtimetoys.com



Easy Assembly Instructions

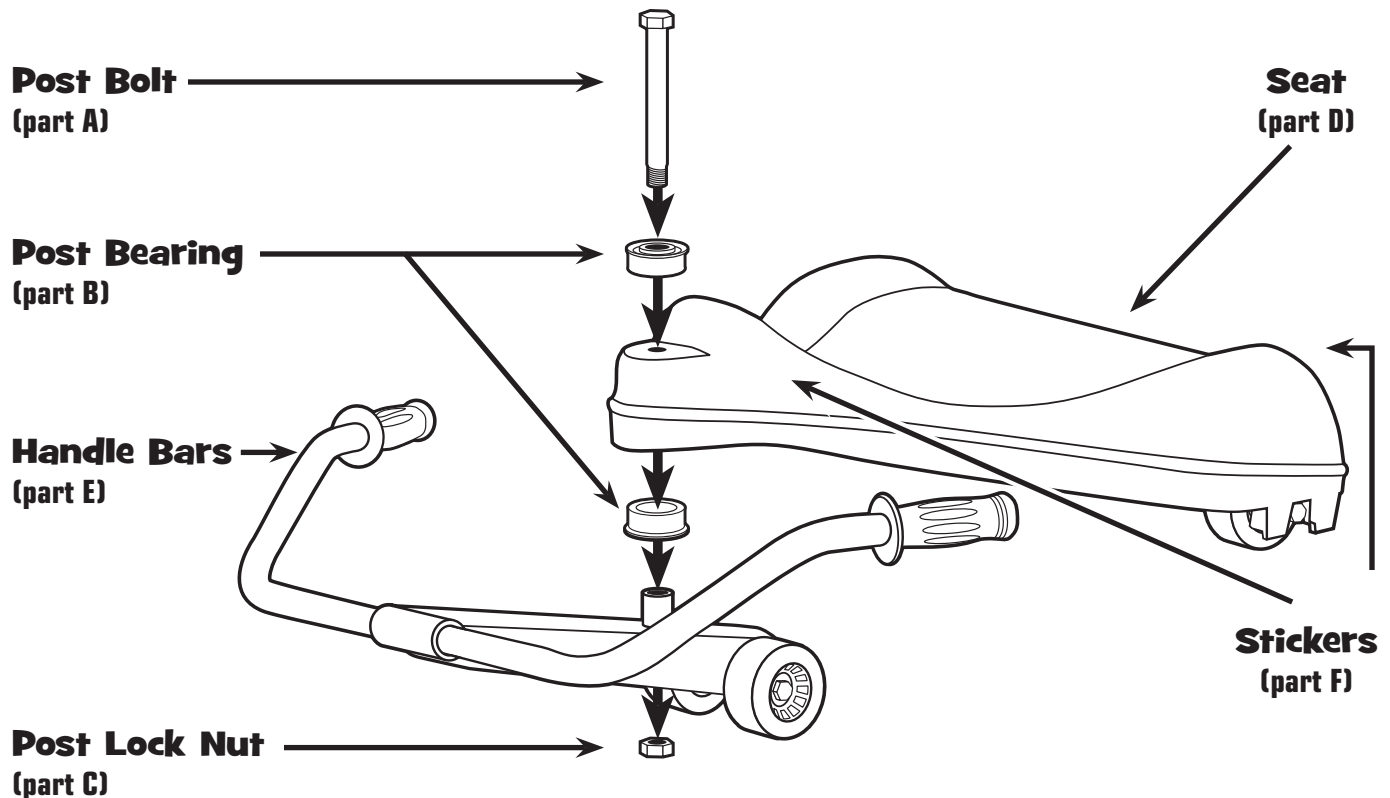

Thank you for your recent purchase of the original Roller Racer®. Within just a few moments and in five easy steps, you will have your Roller Racer® completely assembled and ready for hours of fun in the years to come.

Tools Needed

2 – ¾" Fork Wrenches - Included

Step One

Remove the ¾" Post Lock Nut (part C) from the Post Bolt that extends through the hole in the Roller Racer Seat (part D).

Step Two

Gently tap the Post Bearings (part B), both top and bottom, so that they fit snugly in the front of the seat (part D).

Step Three

Slide the Roller Racer® handlebars (part E) over the Post Bolt (part A) that has been inserted through the top of the Roller Racer® seat (part D) (See Diagram).

Step Four

Attach the Post Lock Nut (part C) to the Post Lock Bolt. Place one ¾" fork/socket wrench on the Post Bolt (part A) and the other ¾" fork/socket wrench on the Post Lock Nut (part C). Tighten. NOTE: The seat should move freely, with only a slight amount of tension when you hold the handlebars and swing the seat from side to side.

Step Five

Carefully apply the 3 stickers to the rear of seat and to both sides as the photograph on the box shows.

Your Roller Racer® is now ready for hours of fun!